

2774 1 14 5  
FREIP025US  
PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: SEITZ, et al

Serial No.: 09/439,915

Filed: November 12, 1999

For: METHOD AND DEVICE FOR FORMING AN IMAGE

SUBMISSION OF PRIORITY DOCUMENT AND CLAIM FOR PRIORITY

Hon. Commissioner of Patent and Trademarks  
Washington, D.C. 20231

Sir:

Applicant hereby claims the benefit under 35 USC § 119 of European Patent Application Serial No. 98121897.7 filed November 18, 1998. A certified copy of the European priority application is enclosed.

Respectfully submitted,

*Marina T. Larson*

Marina T. Larson  
PTO Reg. No. 32,038  
(970) 668-2050

Enclosure

RECEIVED  
JAN 10 2000  
TECH CENTER 2700

I hereby certify that this paper and the attachments named herein are being deposited with the United States Postal Service as first class mail in an envelope addressed to Commissioner of Patents and Trademarks, Washington, D.C. 20231 on 1/3/00

1/3/00  
Date of Signature

*Marina T. Larson*  
Marina T. Larson, PTO Reg. No. 32,038



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

**98121897.7**

RECEIVED  
JAN 10 2000  
TECH CENTER 2100

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**I.L.C. HATTEN-HECKMAN**



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.: 98121897.7  
Demande n°:

Anmeldetag:  
Date of filing: 18/11/98  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
C. S. E. M. CENTRE SUISSE D'ELECTRONIQUE ET DE MICROTECHNIQUE SA  
2007 Neuchâtel  
SWITZERLAND

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
Method and device for forming an image

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

H04N3/15

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

## METHOD AND DEVICE FOR FORMING AN IMAGE

The invention relates to a method for forming an image and to an image sensor with an active area containing a plurality of pixels. It makes possible a wide dynamic range but obviates the need for a storage of complete images. It reduces temporal aliasing to a minimum and eliminates spatial aliasing.

- 5 Image sensing devices can be realized with semiconductors based on their capability to convert locally impinging light energy into a proportional amount of electronic charge. More specifically, if a picture element is exposed during time  $T$  to the local light power  $P_L$ , a charge signal  $Q$  is created according to the equation

$$Q = P_L \gamma T \quad (1)$$

- 10 where  $\gamma$  denotes the conversion efficiency of photons into electronic charge, which strongly depends on the wavelength spectrum of the incoming light. This charge  $Q$ , often called photocharge, can be stored in a two-dimensional array of charge storage devices such as a reverse biased diode (as in photodiode-based image sensors) or such as a pre-charged metal-oxide-semiconductor capacitance (as in charge-coupled  
15 devices, CCDs).

Due to the limited storage capacity of these storage devices, the ratio of maximum storable photocharge to photocharge detection noise, called dynamic range, is also limited. In typical CCD or photodiode image sensors, the available dynamic range is

- 2 -

of the order of 1'000:1. Unfortunately, natural scenes (where there is no control of lighting conditions) and indoor scenes with highly varying illumination have a dynamic range of between 100'000:1 and 1'000'000:1.

5 The dynamic range of an image sensor can be increased by making use of the exposure time dependence shown in Equation (1). The patents US-5,144,442, US-5,168,532, US-5,309,243 and US-5,517,242 describe methods based on the acquisition of two or more images, each with its individual exposure time. At least one complete image has to be stored with these methods, preferentially in digital form by making use of a frame-store. This results in a complex and cost-intensive system. Moreover, the two or more images with different exposure times cannot be  
10 taken concurrently, therefore not representing the same moving scenes at different exposure levels but rather at different points in time. Consequently, such methods exhibit undesirable temporal aliasing.

15 This problem can be overcome by a method described in US-5,483,365 and US-5,789,737. The approach taken in US-5,483,365 consists of using alternate image sensor rows for different exposure times. US-5,789,737 teaches the use of several picture elements (pixels), each with its own sensitivity. In both cases, the brightness information may be acquired concurrently in time but not at the identical geometrical pixel location. This implies spatial undersampling and aliasing, which is particularly  
20 undesirable in the case of so-called highlights, i.e., localized very bright pixel values usually caused by specular reflections at objects in the scene.

Once a plurality of images have been taken at different exposure times, they have to be fused or merged to form one single piece of pixel information of wide dynamic range. Patents US-4,647,975, US-5,168,532 and US-5,671,013 teach that the  
25 information is copied from the most suitable of the images, according to some

- 3 -

selection rule. This value is then multiplied with a suitable factor that corrects for the respective exposure time. This method works well only for ideal image sensors with completely linear pixel behavior, irrespective of illumination level and exposure time. In practical image sensors, this is not true, and the resulting response curve  
5 (output value vs. illumination levels) shows discontinuities. This is particularly disturbing if the resulting images are processed further, leading to false contours and erroneous contrast values. An improvement is taught by US-5,517,242 claiming an algorithm where the output value at each pixel site is calculated in a certain brightness range as a linear combination of the values at two different exposure  
10 times, corrected by an appropriate factor that compensates for the different exposure times. In all these methods, either complete images have to be stored, or complex and surface-intensive electronic circuitry in each pixel is required.

It is the aim of the invention to overcome the aforementioned disadvantages of the prior-art methods and image sensors. In particular, the invention shall make possible  
15 a wide dynamic range but obviate the need for a storage of complete images. It shall, moreover, reduce temporal and spatial aliasing to a minimum. The problem is solved by the invention as defined in the independent claims.

The invention is based on the local acquisition of pixel information for different exposure times, following Equation (1). The problems of the requirement for  
20 complete image storage and of temporal or spatial sampling at different points in time or in space are overcome by using a type of image sensors in which a subset of pixels (e.g., a single pixel or a row of pixels) can be individually reset and read out. A preferred embodiment is an active pixel sensor (APS) pixel that can be fabricated in standard CMOS technology. Such an APS is described for example in E.R.  
25 Fossum, "Active Pixel Sensors: Are CCD's Dinosaurs?", *Proc. SPIE* 1900 (1993) 2-14.

- 4 -

The method according to the invention for forming an image uses an image sensor with an active area containing a plurality of pixels. The method comprises

- a) in  $n$  interrogation runs performed on a first subset of pixels, where  $n$  is an integer and  $n \geq 2$ , resetting the first subset of pixels, exposing the first subset of pixels  
5 and reading out the output value(s) of the first subset of pixels;
- b) combining said output values into a first combined output value;
- c) repeating steps a) and b) for at least one second subset of pixels.

In order to obtain a complete image information, steps a) and b) are preferably repeated until each pixel has been read out at least once.

- 10 The subset is understood to contain less pixels than the whole image sensor. The subset may be, e.g., a row, a column or a single pixel of the image sensor. All subsets preferably have the same number of pixels. The subsets are preferably defined before performing step a) of the method by partitioning the active area of the image sensor. The processing of one subset of pixels may temporally overlap with the processing of  
15 the following subset of pixels.

- In a preferred embodiment of the invention,  $n = 2$  for all subsets of pixels, i.e., each subset is exposed twice, with a longer and a shorter exposure time. A first reset command is issued to one pixel or all pixels in one row. After a first, long exposure time  $T_{\text{long}}$ , the output value(s)  $P_{\text{long}}$  of the pixel or all pixels in this row is/are read out  
20 and immediately stored in analog or digital form. Immediately afterwards, the pixel or row of pixels is reset and exposed during a second, short exposure time  $T_{\text{short}}$ . The output value(s)  $P_{\text{short}}$  of the pixel or row of pixels is/are read out. This information is either again stored in analog or digital fashion, or it can immediately be processed together with the previously stored pixel or row-of-pixel output values, according to  
25 the procedure given below. Depending on the desired value of  $T_{\text{long}}$ , the pixel or row

of pixels can immediately be reset for a maximum value of exposure time, or it/they can be reset at a later time. After this pixel or row of pixels has been reset and read twice, the next pixel or row of pixels is interrogated in the same fashion.

In the method according to the invention, the timing used to reset and interrogate the sequence of pixels in an image sensor is important. The ratio  $t = T_{\text{long}}/T_{\text{short}}$  is chosen to increase significantly the dynamic range of the image sensor, insuring, however, an overlap between the images. For example, the dynamic range of an image sensor can be increased by the method according to the invention from 70 dB to 110 dB using a ratio of  $t = 100$ . During the long integration time, many pixels or rows of pixels can be interrogated and reset a first time, exposed during a second (much shorter) time interval, interrogated and reset a second time. Preferably, these operations are performed on all other pixels or rows of pixels during the long integration time of one pixel or row of pixels, so that the ratio  $t = T_{\text{long}}/T_{\text{short}}$  is equal to the total number of pixels or rows of pixels of the image sensor. Compared with the state of the art, this has three advantages. Firstly, at most two rows of pixel data have to be stored at one time, and it is completely unnecessary to acquire and store complete images before processing and merging the data. Secondly, the short exposure time occurs immediately after the long one, effectively assuring a quasi-instantaneous exposure. Thirdly, the same pixel location is employed to acquire image data for the different exposure times and no spatial aliasing can occur.

During the first, long exposure, dark objects are detected, whereas very bright objects are not, due to saturation of the corresponding pixels; during the second, short exposure, bright objects are detected, whereas very dark objects are not, due to a too weak signal. According to the invention, the output signals of both exposures are suitably combined in order to increase the dynamic range of the image sensor. Due to imperfections in the practical realizations of the above-described method and device, the two pixel output values  $P_{\text{short}}$  and  $P_{\text{long}}$  measured for the two exposure times will



- 6 -

not be related ideally through the ratio  $t = T_{\text{long}}/T_{\text{short}}$ , i.e.,  $P_{\text{long}}$  will be close to but not identical with  $t \cdot P_{\text{short}}$ . For this reason we need an algorithm that combines the two values in a manner that does not lead to artifacts in subsequent image processing and interpretation procedures. For this, it is important to find a method that ensures a

5 monotonic, smooth transition from values taken with long to values taken with short exposure times.

The invention encompasses the following method to arrive at this goal. For each pixel or row of pixels, the two pixel output values  $P_{\text{long}}$  and  $P_{\text{short}}$  are processed into a single value  $P_{\text{out}}$ , using a merging function  $f(x_1, x_2)$ :

10 
$$P_{\text{out}} = f(P_{\text{long}}, t \cdot P_{\text{short}})$$

The merging function  $f(x_1, x_2)$  is preferably truly monotonic, continuous and continuously differentiable in both independent variables  $x_1$  and  $x_2$ . It should have the following properties:

- (i)  $f(x_1, x_2) = x_1$  for  $x_1 \leq x_{\text{low}}$
- 15 (ii)  $f(x_1, x_2) = x_2$  for  $x_1 \geq x_{\text{up}}$ , where  $0 \leq x_{\text{low}} < x_{\text{up}}$
- (iii)  $f(x_1, x_2)$  increases truly monotonically
- 
- in  $x_1$  and  $x_2$  for  $x_{\text{low}} < x_1 < x_{\text{up}}$

In other words, the merging function  $f(x_1, x_2)$  preferably obeys the following rules:

- (i) Preference is given to the output value  $x_1$  obtained from the longer exposure
- 20 when the output values  $x_1$ ,  $x_2$  or an appropriate combination of the output values  $x_1$ ,  $x_2$ , e.g., their average  $(x_1 + x_2)/2$ , lie beneath a given lower limit  $x_{\text{low}}$ ;
- (ii) Preference is given to the output value  $x_2$  obtained from the shorter exposure
- 25 when the output values  $x_1$ ,  $x_2$  or an appropriate combination of the output values  $x_1$ ,  $x_2$ , e.g., their average  $(x_1 + x_2)/2$ , lie above a given upper limit  $x_{\text{up}}$ ;

- 7 -

- (iii) The merging function  $f(x_1, x_2)$  increases truly monotonically in the output values  $x_1, x_2$  when the output values  $x_1, x_2$  lie between the lower limit  $x_{low}$  and the upper limit  $x_{up}$ .

The parameters  $x_{up}, x_{low}$  are chosen according to the following criteria.

- 5 • The lower limit  $x_{low}$  is given by the minimum illumination required for the short exposure time. For lower illumination, the sensor output corresponds essentially to noise and cannot be interpreted.
- The upper limit  $x_{up}$  corresponds to the output value computed for maximum allowable light intensity for the long exposure time. At higher illumination, the
- 10 sensor shows first a non-linear response and will eventually saturate.

The parameters  $x_{up}, x_{low}$  have either preset values, or can vary with time, e.g., be determined from earlier output signals and thus adapt to the actual illumination of the image sensor.

- 15 A preferred example of a merging function  $f(x_1, x_2)$  for the range for  $x_{low} < x_1 < x_{up}$  is the following:

$$f(x_1, x_2) = \sqrt{cx_1^2 + (1-c)x_2^2} \quad \text{with } c = (x_1 - x_{up}) / (x_{low} - x_{up}) .$$

- 20 This merging function notably exhibits the following desirable properties. It gives increased preference to the value  $x_1$  when  $x_1$  is close to  $x_{low}$ , and it gives increased preference to the value  $x_2$  when  $x_1$  is close to  $x_{up}$ . It is truly monotonic, continuous and continuously differentiable in  $x_1$  and  $x_2$ , inhibiting banding and discontinuous jumps in subsequent algorithms that calculate and employ the first spatial derivative of the local brightness values. Moreover, it is symmetric in  $x_1$  and  $x_2$ .

The above considerations for an example with two interrogation runs, i.e.,  $n = 2$ , may be generalized for the case where  $n \geq 2$ . Then a merging function  $f(x_1, \dots, x_n)$  is used for combining  $n$  output values  $P_1, \dots, P_n$  into a single value  $P_{out}$  according to the formula

5 
$$P_{out} = f(P_1, t_2 \cdot P_2, \dots, t_n \cdot P_n) ,$$

where  $t_2, \dots, t_n$  are appropriate scaling factors.

The merging function can be evaluated either in a general-purpose digital computation unit, a dedicated digital or analog computation unit that is preferentially placed on the same chip as the sensor, or the merging function can be realized with a  
10 lookup-table, either partially or completely.

The image sensor according to the invention comprises an active area containing a plurality of pixels, whereby at least two subsets of pixels may be individually interrogated, i.e., they can individually be reset and read out. The image sensor further comprises means for individually interrogating subsets of pixels, means for  
15 combining output values of said subsets into combined output values, and means for electrically outputting said combined output values.

In the following, the invention and a preferred embodiment thereof are described in more detail with reference to the drawings, wherein:

Fig. 1 shows the output of one pixel in the method according to the invention;

20 Fig. 2 shows the architecture of an image sensor suited for the method according to the invention;

Fig. 3 shows a flow chart of the method according to the invention; and

Fig. 4 shows an output characteristic of a multiple-exposure image sensor according to the invention.

Figure 1 schematically shows the output  $P$  of one given pixel as a function of time  $T$  in the method according to the invention. The figure illustrates an example in which two exposures, a first exposure 31 with a long exposure time  $T_{\text{long}}$  and a second exposure 34 with a short exposure time  $T_{\text{short}}$ , are performed on each subset of pixels. After the first exposure 31, the pixel output value is read out 32 and reset 33 for a first time. A second read-out 35 and, optionally, a second reset 36 are performed after the second exposure 34. Then, the pixel is ready for a further interrogation cycle. Of course, other variants of the method are possible in which, e.g., the first exposure time is shorter and the second one is longer, or in which more than two exposures are performed in one interrogation cycle.

Figure 2 shows a schematic of the architecture of an image sensor suited for carrying out the method according to the invention. In this exemplified embodiment, the image sensor has an active area 1 consisting of a matrix of  $256 \times 256$  pixels 10, 10', ... arranged in rows 11, 11', ... and columns 12, 12', ... A row address decoder 2 and a reset address decoder 3 are provided for the rows 11, 11', ... The reset address decoder has the function of an electronic row shutter. A column driver 4 and a column address decoder 5 are provided for the columns 12, 12', ... The image signals are outputted via a video output 6.

Referring to the image sensor of Fig. 2, Figure 3 shows a flow chart of a preferred embodiment of the method according to the state of the art. A read-out sequence for one full frame with two exposures (cf. Fig. 1) is shown. In this embodiment, the

- 10 -

subsets of pixels are the 256 rows 11, 11', ... of the image sensor, each subset thus consisting of 256 pixels 10, 10', ... The first subset to be interrogated is, e.g., row No. 255. A first reset command 21 is issued to all pixels in row No. 255. After a first, long exposure time 22, the output values  $P_{long}^{(255,255)}$  to  $P_{long}^{(255,0)}$  of all 256 pixels in this

5 row No. 255 are read out 23 and immediately stored 24 in analog or digital form. Immediately afterwards, row No. 255 is reset 25 and exposed during a second, short exposure time 26. The output values  $P_{short}^{(255,255)}$  to  $P_{short}^{(255,0)}$  of all 256 pixels are read out 27. This information is either again stored in analog or digital fashion, or it can immediately be processed 28 together with the previously stored output values

10  $P_{long}^{(255,255)}$  to  $P_{long}^{(255,0)}$ . After row No. 255 has been reset and read twice, the next row No. 254 is interrogated in the same fashion; the corresponding elements in Fig. 3 are designated with the same reference numbers as for row No. 255 and additional apostrophes, e.g., reference number 21' stands for a first reset command to all pixels in row No. 254. These steps are performed for each row, ending with row No. 0.

15 Then each pixel has been read out once, in two interrogation runs, and a first complete image can be built up 29 from the processed output values  $P_{out}^{(255)}$  to  $P_{out}^{(0)}$ . This procedure can be repeated as many times as desired.

Figure 4 schematically shows an output characteristic of a multiple-exposure image sensor according to the invention, i.e., output values  $P$  as functions of the light

20 intensity  $I$ . Again, an exemplified embodiment with two exposures is discussed. A first graph 41 in Fig. 4 represents the output  $P_{long}$  for the long exposure. For low intensities,  $P_{long}$  increases linearly with the intensity  $I$ ; above an upper limit  $x_{up}$ , it flattens due to saturation. A second graph 42 in Fig. 4 represents output  $P_{short}$  for the short exposure, multiplied with a scaling factor  $t$ , i.e.,  $t \cdot P_{short}$ . Beneath a lower limit

25  $x_{low}$ , the signal is too weak and therefore useless; for higher intensities,  $t \cdot P_{short}$  increases linearly with the intensity  $I$ . A third graph 43 in Fig. 4 shows an example for a combined output

- 11 -

$$P_{out} = f(P_{long}, t \cdot P_{short}) .$$

The merging function  $f(x_1, x_2)$  has the following properties:

- (i)  $f(x_1, x_2) = x_1$  for  $x_1 \leq x_{low}$
- (ii)  $f(x_1, x_2) = x_2$  for  $x_1 \geq x_{up}$ , where  $0 \leq x_{low} < x_{up}$
- 5 (iii)  $f(x_1, x_2)$  increases truly monotonically in  $x_1$  and  $x_2$  for  $x_{low} < x_1 < x_{up}$

This merging function gives increased preference to the value  $x_1$  when  $x_1$  is close to  $x_{low}$ , and it gives increased preference to the value  $x_2$  when  $x_1$  is close to  $x_{up}$ . Thus the combined output  $P_{out}$  exhibits a smooth transition from the long-exposure range to the scaled short-exposure range.

This invention is not limited to the preferred embodiments described above, to which variations and improvements may be made, without departing from the scope of protection of the present patent.

- 12 -

## CLAIMS

1. Method for forming an image by means of an image sensor with an active area (1) containing a plurality of pixels (10, 10', ...), comprising
  - a) in  $n$  interrogation runs performed on a first subset (11) of pixels, where  $n$  is an integer and  $n \geq 2$ , resetting (21, 25) the first subset of pixels (11),  
 5 exposing (22, 26) the first subset (11) of pixels and reading out (23, 27) the output value(s) ( $P_{long}^{(255)}$ ,  $P_{short}^{(255)}$ ) of the first subset (11) of pixels;
  - b) combining said output values ( $P_{long}^{(255)}$ ,  $P_{short}^{(255)}$ ) into a first combined output value ( $P_{out}^{(255)}$ );
  - 10 c) repeating steps a) and b) for at least one second subset (11') of pixels.
2. Method according to claim 1, wherein said subsets are rows (11, 11', ...), columns (12, 12', ...) or single pixels (10, 10', ...) of the image sensor.
3. Method according to claim 1 or 2 wherein prior to step a), the active area (1) of the image sensor is partitioned into subsets (11, 11', ...) with equal numbers (256)  
 15 of pixels (10, 10', ...).
4. Method according to one of the claims 1-3, wherein in step a), at least one of said output value(s) ( $P_{long}^{(255)}$ ) is/are stored (24, 24', ...).
5. Method according to one of the claims 1-4, wherein steps a) and b) are repeated until each pixel (10, 10', ...) has been read out at least once.

6. Method according to one of the claims 1-5, wherein the processing of one subset (11) of pixels temporally overlaps with the processing of the following subset (11') of pixels.
7. Method according to one of the claims 1-6, wherein  $n = 2$  for all subsets (11, 11', ... ) of pixels.
8. Method according to claim 7, wherein in step a), a longer exposure (22, 22', ...) and a shorter exposure (26, 26', ...) are performed.
9. Method according to claim 8, wherein during said longer exposure (22) of one subset (11), steps b) are performed for all other subsets (11', ...).
10. Method according to one of the claims 1-9, wherein in step b), said output values ( $P_1, \dots, P_n$ ) are combined into a combined output value ( $P_{out}$ ) by means of a merging function ( $f(x_1, \dots, x_n)$ ) which is truly monotonic, continuous and continuously differentiable in all said output values ( $P_1, \dots, P_n$ ).
11. Method according to claim 10 and one of the claims 8 or 9, wherein said merging function ( $f(x_1, x_2)$ ) has the following properties:
  - (i) Preference is given to the output value ( $x_1$ ) obtained from the longer exposure (22, 22', ...) when said output values ( $x_1, x_2$ ) or a combination of said output values ( $(x_1 + x_2)/2$ ) lie beneath a given lower limit ( $x_{low}$ );
  - (ii) Preference is given to the output value ( $x_2$ ) obtained from the shorter exposure (26, 26', ...) when said output values ( $x_1, x_2$ ) or a combination of said output values ( $(x_1 + x_2)/2$ ) lie above a given upper limit ( $x_{up}$ );



- 14 -

(iii) Said merging function ( $f(x_1, x_2)$ ) increases truly monotonically in said output values ( $x_1, x_2$ ) when said output values ( $x_1, x_2$ ) lie between said lower limit ( $x_{low}$ ) and said upper limit ( $x_{up}$ ).

12. Method according to claim 11, wherein said merging function ( $f(x_1, x_2)$ ) is defined  
5 by

$$f(x_1, x_2) = \sqrt{cx_1^2 + (1-c)x_2^2} \quad \text{with } c = (x_1 - x_{up}) / (x_{low} - x_{up})$$

for  $x_{low} < x_1 < x_{up}$ .


13. Method according to one of the claims 1-12, wherein said image sensor is an active pixel sensor (APS).

10 14. Method according to one of the claims 1-13, wherein said output values ( $P_{long}$ ,  $P_{short}$ ) are combined using a general-purpose digital computation unit, a dedicated digital or analog computation unit or a lookup table.


15 15. Image sensor for performing the method according to claim 1, comprising  
an active area (1) containing a plurality of pixels (10, 10', ...), whereby at least  
two subsets (11, 11', ...) of pixels allow an individual interrogation;  
means (2, 3) for individually interrogating subsets (11, 11', ...) of pixels;  
means for combining output values ( $P_{long}^{(255)}$ ,  $P_{short}^{(255)}$ ) of said subsets (11, 11', ...)  
into combined output values ( $P_{out}^{(255)}$ ); and  
means (6) for electrically outputting said combined output values ( $P_{out}^{(255)}$ ).

- 15 -


16. Image sensor according to claim 15, said image sensor being an active pixel sensor (APS).

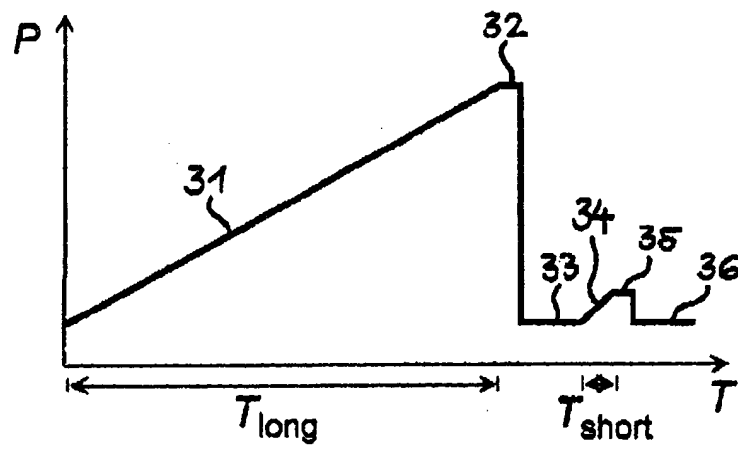

**Fig. 1**

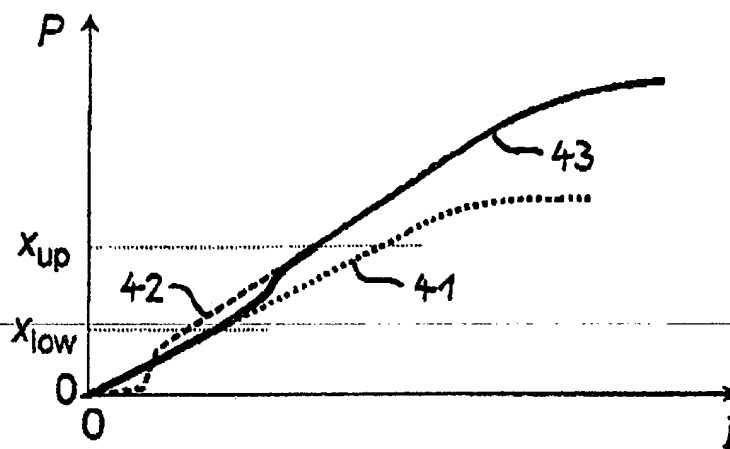

**Fig. 4**

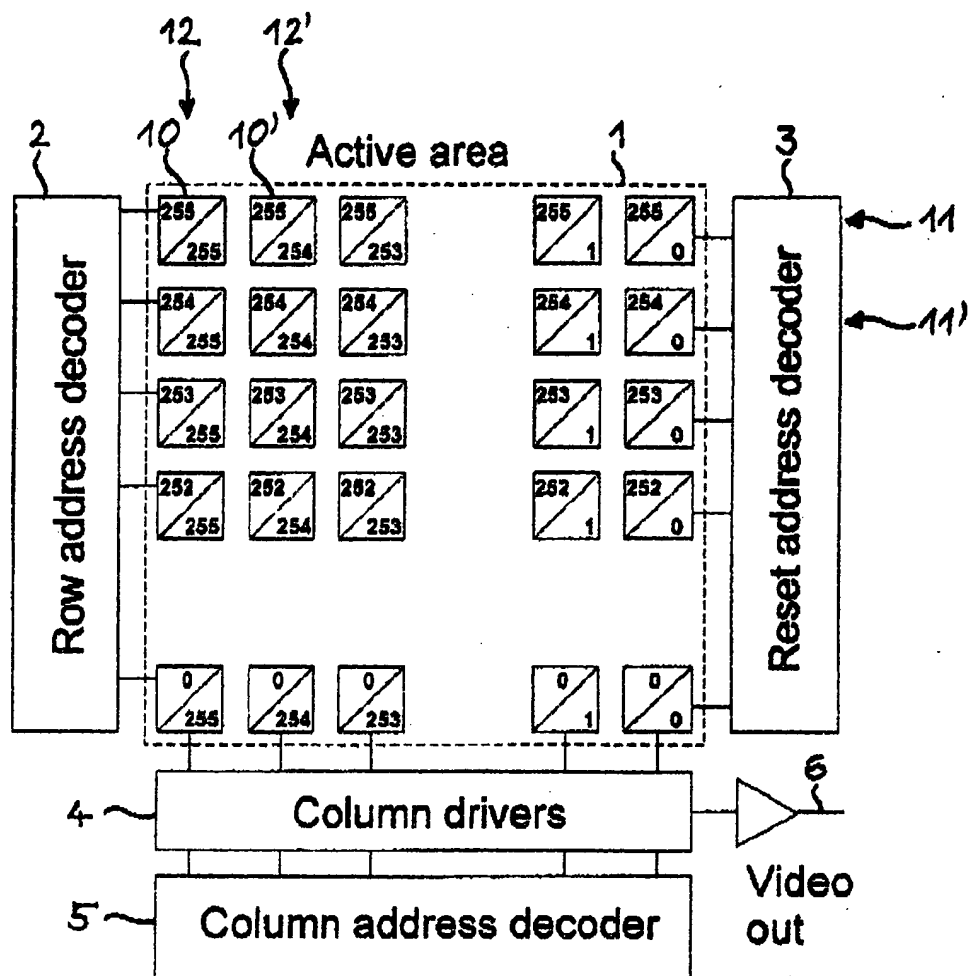

**Fig. 2**

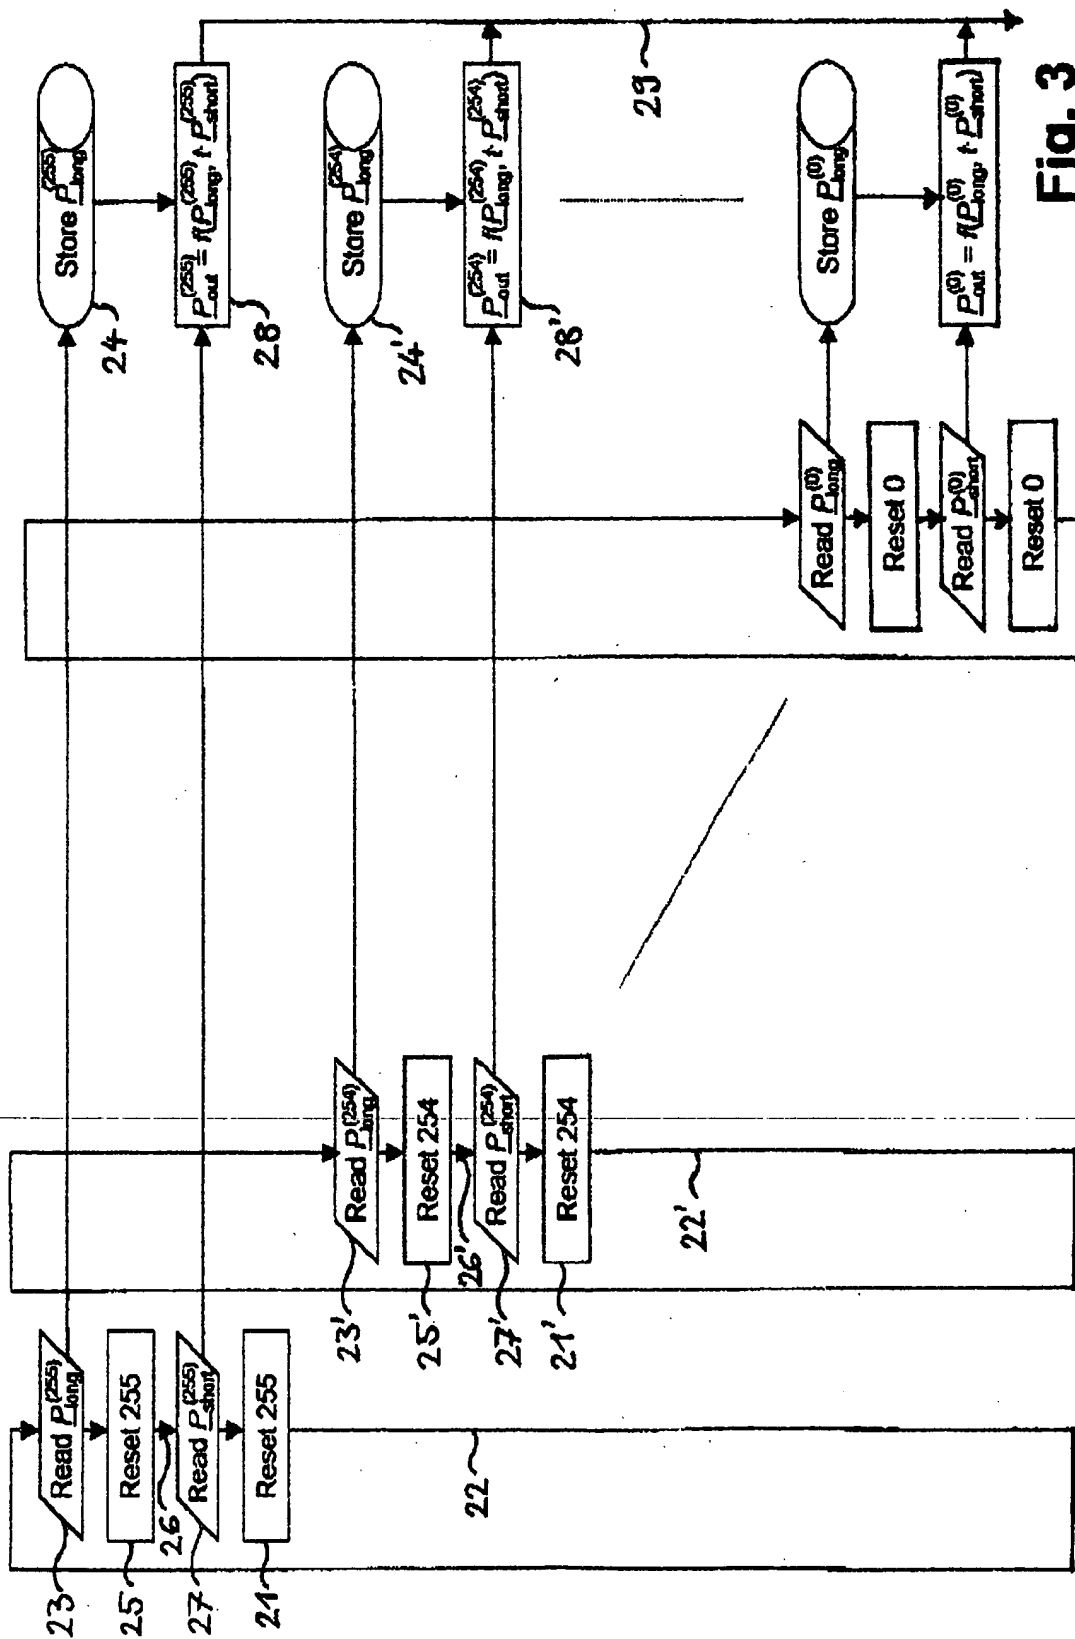


Fig. 3

**ABSTRACT**

The method for forming an image with a wide dynamic range makes use of an image sensor containing subsets of pixels that can be individually reset. After an initial reset (21), a pixel or row of pixels is exposed (22) for a first time interval and the gray value(s) ( $P_{long}^{(255)}$ ) are read out (23) and stored (24). The pixel or row of pixels is then  
5 reset (25) and exposed (26) for a second, shorter time interval. The second gray value(s) ( $P_{short}^{(255)}$ ) is/are read out (27) and either stored or immediately combined (28) with the first gray value(s) ( $P_{long}^{(255)}$ ) by means of a merging function ( $f$ ). The merging function ( $f$ ) ensures a monotonic, smooth change in output from the lowest to the  
10 highest gray values. The procedure is repeated for all pixels or rows of pixels in the image sensor, thus obviating the need for the storage of complete images. The method reduces temporal aliasing to a minimum and eliminates spatial aliasing.

(Figure 3)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**